

KombiSIGN 70 / LED Blinking Beacon 843

LED Blinking light element 230VAC RD







| MECHANICAL DATA | |
|-----------------------------|-------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Dome colour | Red |
| Protection category | IP54 |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 84 g |
| Product weight | 70 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------------|
| Operating voltage | 230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 35 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |

| OPTICAL DATA | |
|----------------------|-------------------|
| Light source | LED |
| Light colour | Red |
| Optical signal image | Blink |
| Blink frequency | 1 Hz |
| Service life optical | 100,000 h maximum |

| APPROVAL DATA | |
|------------------------------|---------|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 70 / LED Blinking Beacon 843

LED Blinking light element 230VAC RD

| Conforms with IC | No |
|-------------------------------|-----------------------|
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

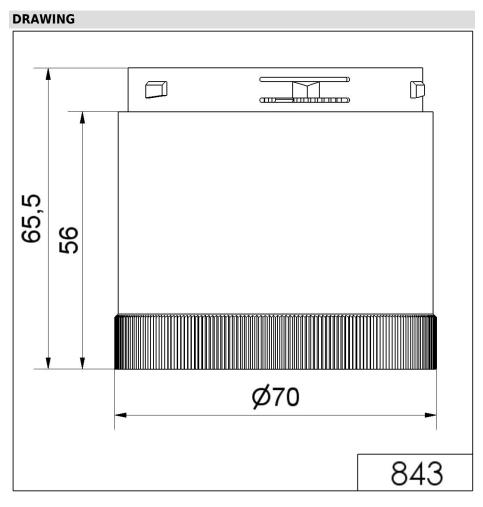

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.