Horns and Sirens / Heavy-Duty multi-tone sounder Multi-t.sounder WM 31 tne 115VAC RD



Part No.: 129.052.67



MECHANICAL DATA Length 161 mm Width 143 mm Height 161 mm Materials Aluminium Housing colour Red Protection category IP66 IP67 Connection Screw terminals 2,50mm² / 14AWG cross-sectional area maximum Screwed cable gland Cable entry Cable entry minimum d = 8 mm Cable entry maximum d = 12 mm Present (conforms to VDE) Tension relief Type of fixing Wall mounting -40°C Working temperature minimum Working temperature maximum +55°C Weight with packaging 2760 g Product weight 2583 g **ELECTRICAL DATA**

115V	
AC	
60Hz	
+/- 10%	
115 VAC	
120 mA	
950 mA	
Protection class 1	
3	
II	
Ui = 250V; Uimp = 2.500V	
ACOUSTIC DATA	
110,0 dB (A)	
Multi-tone	
32 tone	
5,000 h minimum	

APPROVAL DATA


Por additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Horns and Sirens / Heavy-Duty multi-tone sounder Multi-t.sounder WM 31 tne 115VAC RD

Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	Yes
Conforms with RoHS CN	No
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Horns and Sirens / Heavy-Duty multi-tone sounder Multi-t.sounder WM 31 tne 115VAC RD

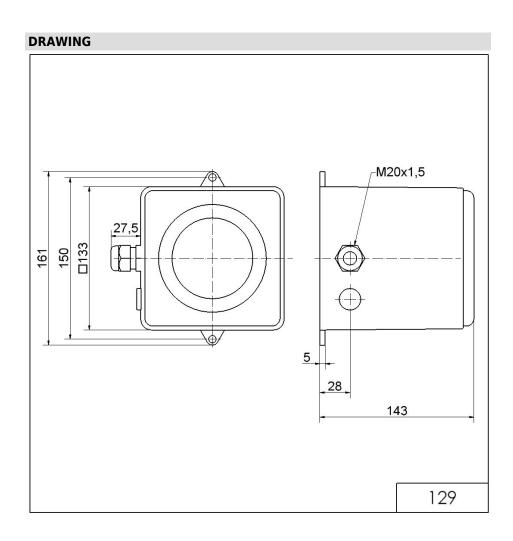

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.