Micro installation beacon / LED Beacon 231 Economy Micro LED Installation Beacon Eco 24V RD



!

Part No.: 231.104.55



MECHANICAL DATA

MECHANICAL DATA	
Height	152 mm
Diameter	29 mm
Materials	PC PC/ABS
Dome colour	Red
Housing colour	Black
Protection category	IP65
Connection	Cable
Cable length	105 mm
Type of fixing	Built-in mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	20 g
Product weight	14 g
ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage type	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	30 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3
	In the connection area: 2
OPTICAL DATA	
Light source	LED
Light colour	Red
Optical signal image	Permanent
Service life optical	100,000 h maximum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12
Service life optical APPROVAL DATA Conforms with CE Conforms with RoHS directive WEEE Conforms with ATEX-directive Conforms with CCC Conforms with UL	100,000 h maximum Yes Yes Yes No No CULus

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Micro installation beacon / LED Beacon 231 Economy Micro LED Installation Beacon Eco 24V RD


Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!



Micro installation beacon / LED Beacon 231 Economy Micro LED Installation Beacon Eco 24V RD

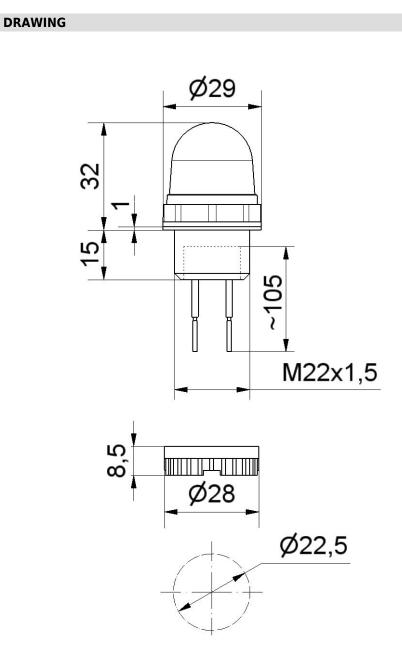

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.