Completely pre-assembled Signal Towers / RST 56 RST56 GN/RD 24V



Series:	886.260.05 RST 56	
Jerresi	NOT SU	
MECHAN	ICAL DATA	
Height		156 mm
Diameter		57 mm
Materials		ABS PC PC/ABS
Dome colour		White
Housing colour		Black
Protection category		IP66 IP69K
Connection		Spring-type terminal
cross-sectional area minimum		um 0,14mm² / 26AWG
cross-sectional area maximum		num 1,50mm² / 16AWG
Cable entry		Through hole
Cable entry maximum		d = 9 mm
Type of fixing		Base mounting
Working temperature minimum		mum -30°C
Working temperature maximum		imum +50°C
Weight with packaging		228 g
Product weight		192 g
Stipping length		7 mm
IK-Code (IEC 62262)		IK05
ELECTRIC	CAL DATA	
Operating voltage		24V
Operating voltage type		DC
Operating voltage tolerance		e +/- 10%
Rated operational voltage		24 VDC
Rated operational current		70 mA
Rated inrush current		200mA
Protection class		Protection class 3
Pollution degree		3
OPTICAL	DATA	
Light source		LED
Light colour		Green Red
Optical signal image		Permanent
Service life optical		50,000 h maximum

APPROVAL DATA

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


ļ

Completely pre-assembled Signal Towers / RST 56 RST56 GN/RD 24V

Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	25 years
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / RST 56 RST56 GN/RD 24V

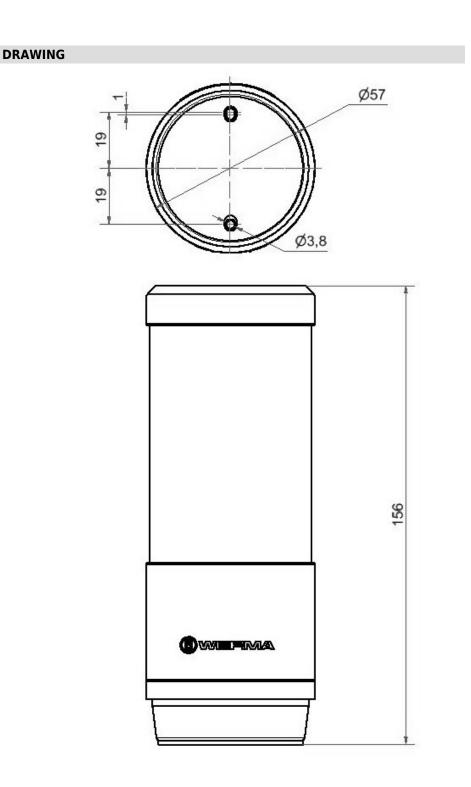

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.