

KombiSIGN 70 / Audible Devices 844

Vocal element 24VDC BK



| | |
|------------------|---------------------|
| Part No.: | 844.840.55 |
| Series: | KombiSIGN 70 |



MECHANICAL DATA

| | |
|-----------------------------|-------------|
| Height | 110 mm |
| Diameter | 70 mm |
| Materials | PC |
| Housing colour | Black |
| Protection category | IP54 |
| Tension relief | Not present |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 313 g |
| Product weight | 262 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 400 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

OPTICAL DATA

| | |
|----------------------|-----------------|
| Service life optical | 5,000 h minimum |
|----------------------|-----------------|

ACOUSTIC DATA

| | |
|-----------------------------|-----------------|
| Volume (max) at 1m distance | 88,0 dB (A) |
| Volume adjustable | Potentiometer |
| Volume adjustment range | 10-100% |
| Acoustic service life | 5,000 h minimum |

APPROVAL DATA

| | |
|------------------------------|---------|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 70 / Audible Devices 844

Vocal element 24VDC BK

| | |
|-------------------------------|-----------------------|
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

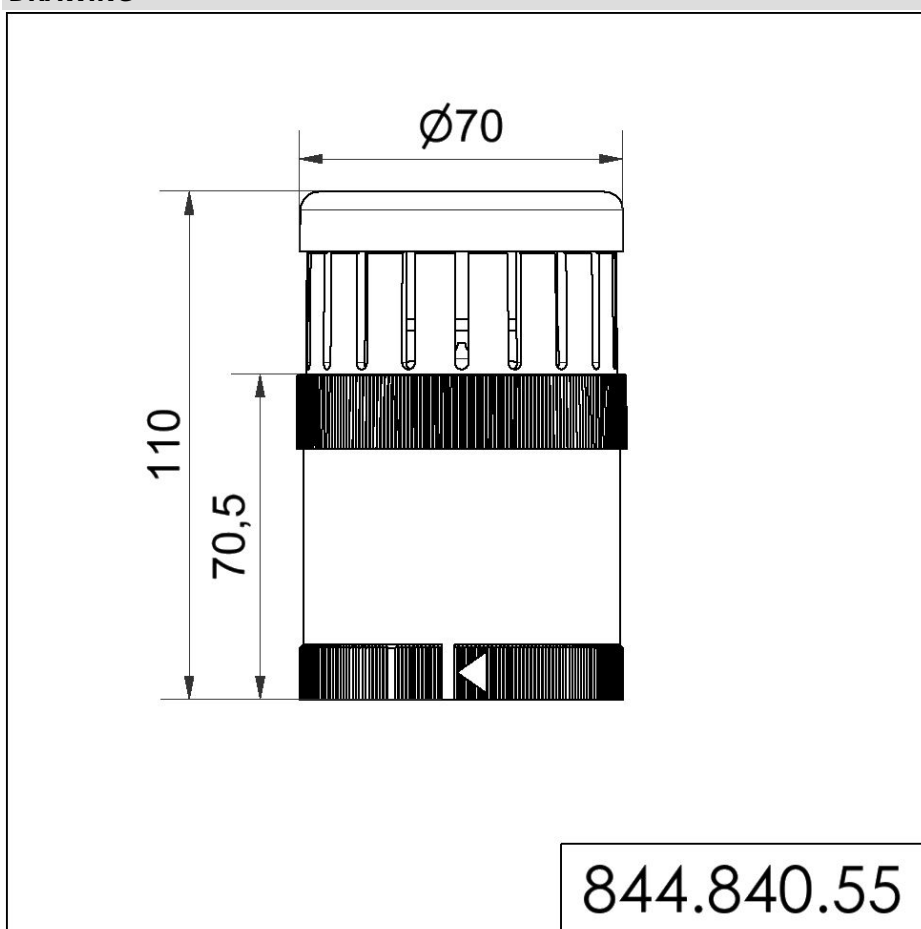

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.