

## Midi free-standing Beacons / Permanent Light 826

### Permanent Beacon RM 12-230VAC/DC RD



Part No.: 826.110.00



#### MECHANICAL DATA

|                              |                                |
|------------------------------|--------------------------------|
| Height                       | 200 mm                         |
| Diameter                     | 99 mm                          |
| Materials                    | PC<br>PC/ABS                   |
| Dome colour                  | Red                            |
| Housing colour               | Black                          |
| Protection category          | IP65                           |
| Connection                   | Insulation-displacement contac |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG    |
| Cable entry                  | Through hole                   |
| Cable entry maximum          | d = 11 mm                      |
| Type of fixing               | Tube mounting                  |
| Working temperature minimum  | -20°C                          |
| Working temperature maximum  | +50°C                          |
| Weight with packaging        | 290 g                          |
| Product weight               | 225 g                          |

#### ELECTRICAL DATA

|                        |                          |
|------------------------|--------------------------|
| Operating voltage      | 12-230V                  |
| Operating voltage type | AC/DC                    |
| Protection class       | Protection class 2       |
| Pollution degree       | 3                        |
| Overvoltage category   | II                       |
| Isolation voltage      | Ui = 250V; Uimp = 2.500V |

#### OPTICAL DATA

|                      |                 |
|----------------------|-----------------|
| Light colour         | Red             |
| Service life optical | depends on bulb |

#### APPROVAL DATA

|                              |         |
|------------------------------|---------|
| Conforms with CE             | Yes     |
| Conforms with RoHS directive | Yes     |
| WEEE                         | Yes     |
| Conforms with ATEX-directive | No      |
| Conforms with CCC            | Yes     |
| Conforms with UL             | cULus   |
| UL Type Rating               | Type 12 |
| Conforms with FCC            | No      |
| Conforms with IC             | No      |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

## Midi free-standing Beacons / Permanent Light 826

### Permanent Beacon RM 12-230VAC/DC RD

|                               |                       |
|-------------------------------|-----------------------|
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |

#### DRAWING

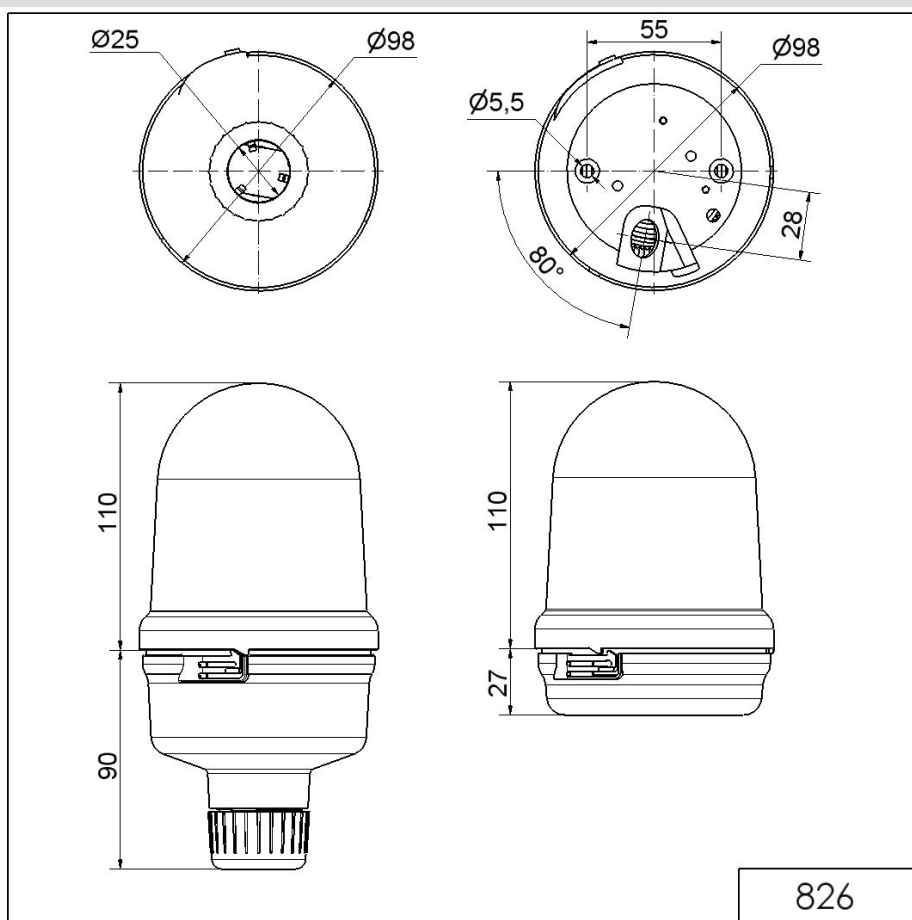

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.