Midi free-standing Beacons / LED EVS Beacon 829 LED EVS Beacon RM 24VDC CL



!

Part No.: 829.497.55



MECHANICAL DATA

MECHANICAL DATA	
Height	200 mm
Diameter	98 mm
Materials	PC PC/ABS
Dome colour	Clear
Housing colour	Black
Protection category	IP65
Connection	Screw terminals
cross-sectional area minimum	0,50mm² / 20AWG
cross-sectional area maximum	1,50mm² / 16AWG
Cable entry	Rubber pinch
Cable entry minimum	d = 5 mm
Cable entry maximum	d = 7 mm
Type of fixing	Tube mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	319 g
Product weight	256 g
ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	300 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3
OPTICAL DATA	
OPTICAL DATA Light source	LED
	LED White
Light source	
Light source Light colour	White
Light source Light colour Optical signal image Service life optical	White EVS
Light source Light colour Optical signal image	White EVS 50,000 h maximum
Light source Light colour Optical signal image Service life optical APPROVAL DATA	White EVS
Light source Light colour Optical signal image Service life optical APPROVAL DATA Conforms with CE	White EVS 50,000 h maximum Yes


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Midi free-standing Beacons / LED EVS Beacon 829 LED EVS Beacon RM 24VDC CL

Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	636

DRAWING

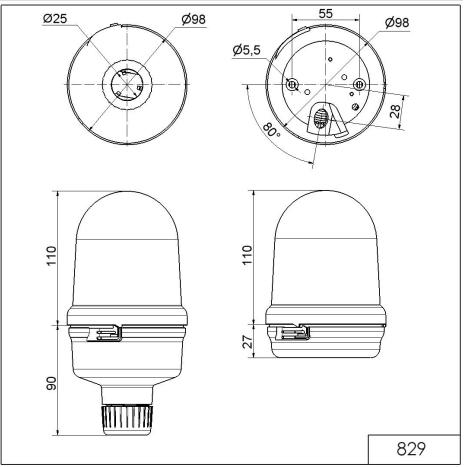

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.