

Heavy-Duty Beacons / LED Rotating Beacon

LED Rotating Beacon BM 115-230VAC RD



Part No.: 839.120.68







189 mm
153 mm
Aluminium PC
Red
Black
IP66 IP67
Screw terminals
1,50mm ² / 16AWG
Screwed cable gland
d = 6 mm
d = 13 mm
Present (conforms to VDE)
Base mounting
-30°C
+50°C
1564 g
1277 g

ELECTRICAL DATA	
Operating voltage	115-230V
Operating voltage type	AC
Operating voltage frequency	50Hz at 230V 60Hz at 115V
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	180 mA
Rated inrush current	500 mA
Protection class	Protection class 1
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

OPTICAL DATA	
Light source	LED
Light colour	Red
Optical signal image	Revolving
Service life optical	50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Heavy-Duty Beacons / LED Rotating Beacon

LED Rotating Beacon BM 115-230VAC RD


Rotation speed (rpm)	180 U/min
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	Yes
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Heavy-Duty Beacons / LED Rotating Beacon

LED Rotating Beacon BM 115-230VAC RD

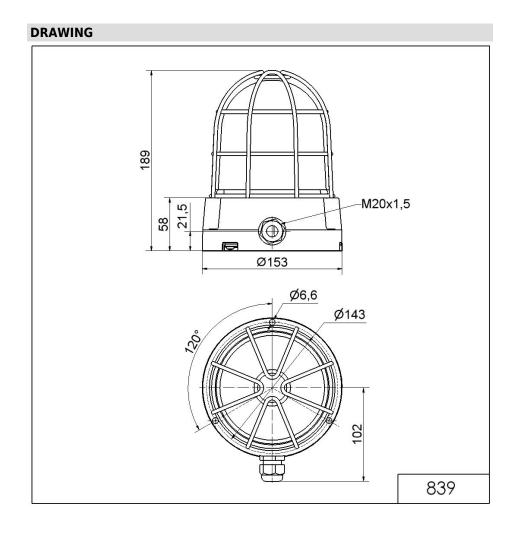

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.