

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM 12VAC/DC GN/YE/RD



Part No.:	698.410.74
eries:	Kompakt 37

MECHANICAL DATA		
Height	175 mm	
Diameter	38 mm	
Materials	PC	
Dome colour	Clear	
Housing colour	Silver	
Protection category	IP65	
Connection	M12 plug 5-pole	
Cable entry	Membrane grommet	
Cable entry minimum	d = 1 mm	
Cable entry maximum	d = 9 mm	
Cable length	150 mm	
Tension relief	Pull-out protection	
Type of fixing	Built-in mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	90 g	
Product weight	90 g	

ELECTRICAL DATA			
Operating voltage	12V		
Operating voltage type	AC/DC		
Operating voltage frequency	50Hz		
Operating voltage tolerance	+/- 10%		
Rated operational voltage	12 VDC		
Rated operational current	275 mA		
Rated inrush current	500 mA		
Protection class	Protection class 2		
Pollution degree	3 In the connection area: 2		

OPTICAL DATA				
Light source	LED			
Light colour	Green Red Yellow			
Optical signal image	Permanent			
Service life optical	50,000 h maximum			

APPROVAL DATA	
Conforms with CE	Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM 12VAC/DC GN/YE/RD


Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM 12VAC/DC GN/YE/RD

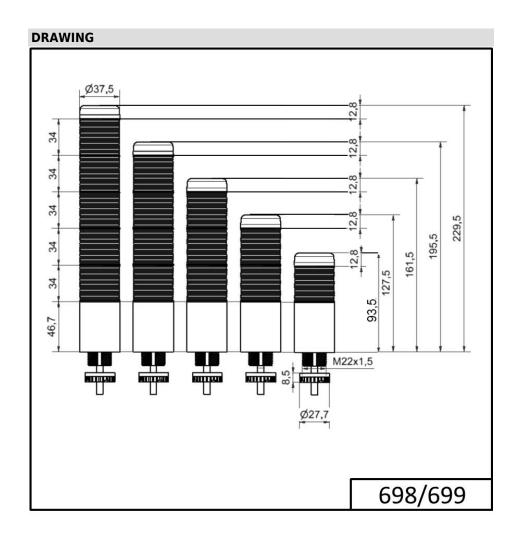

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.