

Micro installation beacon / LED Beacon 231

Micro LED Installation Beacon 12VDC BU





| MECHANICAL DATA | |
|-----------------------------|-------------------|
| Height | 152 mm |
| Diameter | 29 mm |
| Materials | PC PC/ABS |
| Dome colour | Blue |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | Cable |
| Cable length | 105 mm |
| Type of fixing | Built-in mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 21 g |
| Product weight | 16 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------------------|
| Operating voltage | 12V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 12 VDC |
| Rated operational current | 80 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 In the connection area: 2 |

| OPTICAL DATA | |
|----------------------|-------------------|
| Light source | LED |
| Light colour | Blue |
| Optical signal image | Permanent |
| Service life optical | 100,000 h maximum |

| APPROVAL DATA | | |
|------------------------------|---------|--|
| Conforms with CE | Yes | |
| Conforms with RoHS directive | Yes | |
| WEEE | Yes | |
| Conforms with ATEX-directive | No | |
| Conforms with CCC | No | |
| Conforms with UL | cULus | |
| UL Type Rating | Type 12 | |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Micro installation beacon / LED Beacon 231

Micro LED Installation Beacon 12VDC BU

| Conforms with FCC | No |
|-------------------------------|-----------------------|
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Micro installation beacon / LED Beacon 231

Micro LED Installation Beacon 12VDC BU

DRAWING

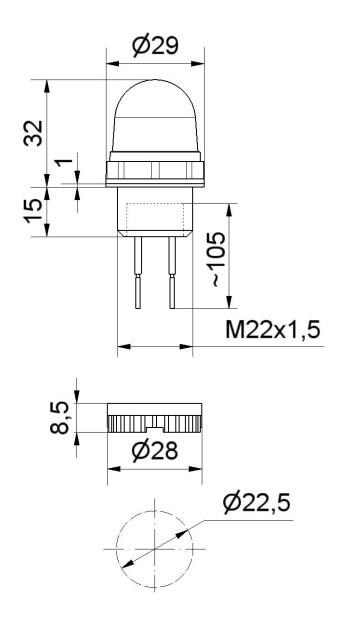

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.