

Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 24VAC/DC GN/YE/R



Part No.: 699.110

MECHANICAL DATA		
Height	175 mm	
Diameter	38 mm	
Materials	PC	
Dome colour	Green Red Yellow	
Housing colour	Black	
Protection category	IP65	
Connection	Cable	
cross-sectional area maximum	0,34mm² / 22AWG	
Cable entry	Membrane grommet	
Cable entry minimum	d = 1 mm	
Cable entry maximum	d = 9 mm	
Cable length	2000 mm	
Tension relief	Pull-out protection	
Type of fixing	Built-in mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	198 g	
Product weight	165 g	

ELECTRICAL DATA			
Operating voltage	24V		
Operating voltage type	AC/DC		
Operating voltage frequency	50Hz		
Operating voltage tolerance	+/- 10%		
Rated operational voltage	24 VDC		
Rated operational current	125 mA		
Rated inrush current	500 mA		
Protection class	Protection class 2		
Pollution degree	3 In the connection area: 2		

OPTICAL DATA			
Light source	LED		
Light colour	Green Red Yellow		
Optical signal image	Permanent		
Service life optical	50,000 h maximum		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 24VAC/DC GN/YE/R

ACOUSTIC DATA			
Volume (max) at 1m distance	85,0 dB (A)		
Acoustic signal image	Pulse tone		
Audio frequency	2900 Hz		
Acoustic service life	5,000 h minimum		


APPROVAL DATA			
Conforms with CE	Yes		
Conforms with RoHS directive	Yes		
WEEE	Yes		
Conforms with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	cULus		
UL Type Rating	Type 12 Type 4X		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with DNV	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 cable EM Pulse tone 24VAC/DC GN/YE/R

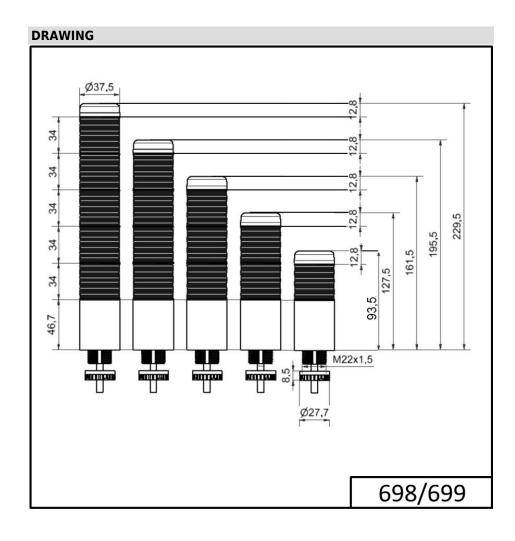

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.