Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC WH



ļ

Dart No.	699.340.75	
Series:	699.340.75 Kompakt 37	
Seriesi	Kompakt 57	
MECHANIC	CAL DATA	
Height		209 mm
Diameter		38 mm
Materials		PC
Dome colour		Clear
Housing colour		Silver
Protection category		IP65
Connection		Cable
cross-sectional area maximum		0,34mm² / 22AWG
Cable entry		Membrane grommet
Cable entry minimum		d = 1 mm
Cable entry maximum		d = 9 mm
Cable length		2000 mm
Tension relief		Pull-out protection
Type of fixing		Built-in mounting
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		230 g
Product weight		192 g
ELECTRIC	AL DATA	
Operating v	voltage	24V
Operating v	voltage type	AC/DC
Operating voltage frequency		50Hz
Operating voltage tolerance		+/- 10%
Rated operational voltage		24 VDC
Rated operational current		160 mA
Rated inrush current		500 mA
Protection class		Protection class 2
Pollution degree		3
		In the connection area: 2
OPTICAL D	DATA	
Light source		LED
Light colour		Green
		Red White
		Yellow
Optical signal image		Permanent
Service life optical		50,000 h maximum


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC WH

ACOUSTIC DATA	
Volume (max) at 1m distance	85,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC WH

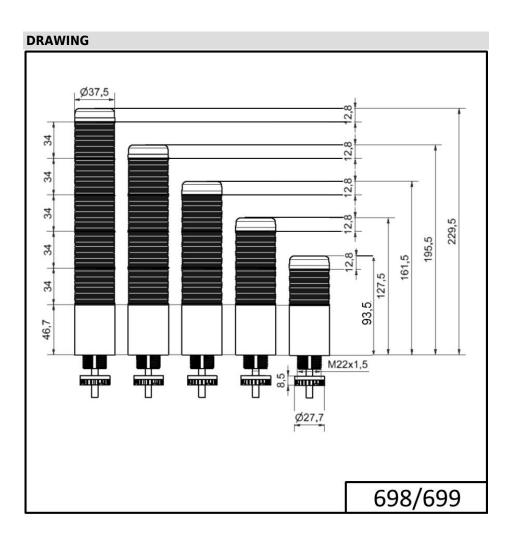

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.