## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 12VAC/DC YE/



ļ

Series:   Kompakt 37     MECHANICAL DATA     Height   141 mm     Diameter   38 mm     Materials   PC     Dome colour   Clear     Housing colour   Black     Protection category   IP65     Connection   M12 plug 5-pole     Cable entry   Membrane grommet     Cable entry maximum   d = 1 mm     Cable entry maximum   d = 9 mm     Cable entry maximum   20 °C     Working temperature minimum   -20 °C     Working temperature maximum   +50 °C     Working temperature maximum   +50 °C     Volute weight   92 g     ELECTRICAL DATA	Part No.:	699.430.74			
Height141 mmDiameter38 mmMaterialsPCDome colourClearHousing colourBlackProtection categoryIP65ConnectionM12 plug 5-poleCable entryMembrane grommetCable entry maximumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable entry maximum-20°CWorking temperature minimum-20°CWorking temperature minimum-20°CWorking temperature minimum-20°CWorking temperature minimum-20°CWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATA	Series:	Kompakt 37			
Diameter38 mmMaterialsPCDome colourClearHousing colourBlackProtection categoryIP65ConnectionM12 plug 5-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable entry maximum-0° CWorking temperature minimum-20° CWorking temperature maximum+50° CWeight with packaging128 gProduct weight92 gELECTRICAL DATA	MECHANI	CAL DATA			
MaterialsPCDome colourClearHousing colourBlackProtection categoryIP65ConnectionM12 plug 5-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 0 mmCable entry maximumd = 9 cmCable entry maximum20 °CWorking temperature minimum-20 °CWorking temperature maximum+50 °CWeight with packaging128 gProduct weight92 gELECTRICAL DATAPoleating voltageOperating voltage typeAC/DCOperating voltage typeAC/DCOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational voltage12 VDCRated operational current225 mASated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATAEDLight sourceLEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distanceVolume (max) at 1m distance80,0 dB (A)	Height		141 mm		
Dome colourClearHousing colourBlackProtection categoryIP65ConnectionM12 plug 5-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable length150 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage12VOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated operational current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATAIpelowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distanceVolume (max) at 1m distance80,0 dB (A)	Diameter		38 mm		
Housing colourBlackProtection categoryIP65ConnectionM12 plug 5-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length150 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATA	Materials		PC		
Protection categoryIP65ConnectionM12 plug 5-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length150 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current205 mARated operational current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATAItel connection area: 2OPTICAL DATASol, 000 h maximumACOUSTIC DATARed YellowOptical signal imagePermanentService life optical50, 00 dB (A)	Dome colour		Clear		
ConnectionM12 plug 5-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length150 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAVoltageOperating voltage12VOperating voltage trequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight sourceKed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATASol,00 dB (A)	Housing colour		Black		
Cable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length150 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAVolure (Max) and (Max) an	Protection	category	IP65		
Cable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length150 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage trequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVOUme (max) at 1m distanceVolume (max) at 1m distance80,0 dB (A)	Connection		M12 plug 5-pole		
Cable entry maximumd = 9 mmCable length150 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage trequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVOIume (max) at 1m distanceVolume (max) at 1m distance80,0 dB (A)	Cable entry	/	Membrane grommet		
Cable length150 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 <bbr></bbr> In the connection area: 2OPTICAL DATAEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVOUme (max) at 1m distanceVolume (max) at 1m distance80,0 dB (A)	Cable entry	/ minimum	d = 1 mm		
Tension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourYellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAS0,0 dB (A)	Cable entry	/ maximum	d = 9 mm		
Type of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 a ln the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATA80,0 dB (A)	Cable lengt	th	150 mm		
Working temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 a lin the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATA80,0 dB (A)	Tension rel	ief	Pull-out protection		
Working temperature maximum+50°CWeight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAS0,0 dB (A)	Type of fixi	ng	Built-in mounting		
Weight with packaging128 gProduct weight92 gELECTRICAL DATAOperating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATA80,0 dB (A)			-20°C		
Product weight92 g <b>ELECTRICAL DATA</b> Operating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2 <b>OPTICAL DATA</b> LEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximum <b>ACOUSTIC DATA</b> 80,0 dB (A)			+50°C		
ELECTRICAL DATAOperating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAS0,0 dB (A)	Weight wit	h packaging	128 g		
Operating voltage12VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2 <b>OPTICAL DATA</b> LEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximum <b>ACOUSTIC DATA</b> S0,0 dB (A)			92 g		
Operating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distance80,0 dB (A)	ELECTRICAL DATA				
Operating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATA80,0 dB (A)			12V		
Operating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATA80,0 dB (A)	•	-	AC/DC		
Operating voltage tolerance+/- 10%Rated operational voltage12 VDCRated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVOUUME (max) at 1m distance80,0 dB (A)			50Hz		
Rated operational current225 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distance80,0 dB (A)			+/- 10%		
Rated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distance80,0 dB (A)			12 VDC		
Protection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATA80,0 dB (A)			225 mA		
Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distance80,0 dB (A)	Rated inrus	sh current	500 mA		
In the connection area: 2     OPTICAL DATA     Light source   LED     Light colour   Red Yellow     Optical signal image   Permanent     Service life optical   50,000 h maximum     ACOUSTIC DATA   Yolume (max) at 1m distance	Protection class		Protection class 2		
OPTICAL DATA Light source LED Light colour Red Yellow Optical signal image Permanent Service life optical 50,000 h maximum ACOUSTIC DATA Volume (max) at 1m distance 80,0 dB (A)	Pollution degree		3		
Light sourceLEDLight colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distance80,0 dB (A)	_		In the connection area: 2		
Light colourRed YellowOptical signal imagePermanentService life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distance80,0 dB (A)	OPTICAL I	DATA			
Yellow   Optical signal image Permanent   Service life optical 50,000 h maximum   ACOUSTIC DATA Yolume (max) at 1m distance   80,0 dB (A)	Light source		LED		
Service life optical50,000 h maximumACOUSTIC DATAVolume (max) at 1m distance80,0 dB (A)	Light colour				
ACOUSTIC DATA Volume (max) at 1m distance 80,0 dB (A)	Optical signal image		Permanent		
Volume (max) at 1m distance 80,0 dB (A)	Service life	optical	50,000 h maximum		
	ACOUSTIC	C DATA			
Acoustic signal image Pulse tone	Volume (m	ax) at 1m distance	80,0 dB (A)		
	Acoustic sig	gnal image	Pulse tone		


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 12VAC/DC YE/

Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 12VAC/DC YE/

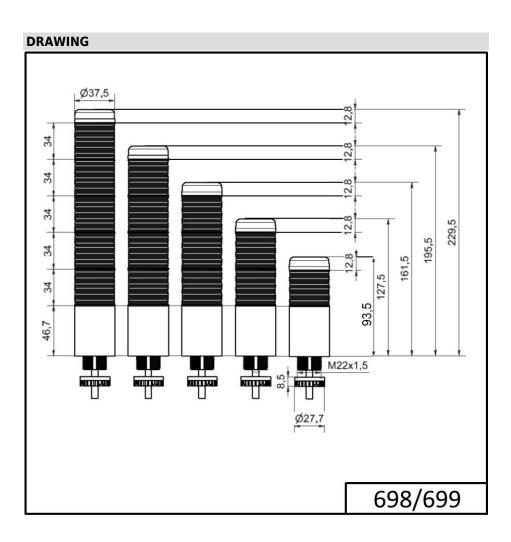

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.