EvoSIGNAL / EvoSIGNAL Accessories Mini Bracket GY




| Part No.: | 260.700.07 | |
|--------------------------------------|------------|---------------|
| Series: | EvoSIGNAL | |
| MECHAN | CAL DATA | |
| Length | | 69 mm |
| Width | | 62 mm |
| Height | | 45 mm |
| Diameter | | 62 mm |
| Materials | | PC/ABS |
| Housing colour | | Grey |
| Protection category | | IP66 |
| Cable entry | | Through hole |
| Cable entry maximum | | d = 12 mm |
| Type of fixing | | Wall mounting |
| Working temperature minimum | | -30°C |
| Working temperature maximum | | +60°C |
| Weight with packaging | | 30 g |
| Product weight | | 26 g |
| ELECTRIC | | |
| Pollution degree | | 3 |
| | | |
| APPROVAL DATA | | Vec |
| Conforms with CE | | Yes |
| Conforms with RoHS directive WEEE | | Yes |
| Conforms with ATEX-directive | | No |
| Conforms with CCC | | No |
| Conforms with UL | | |
| UL Type Rating | | cULus |
| Conforms with FCC | | Type 12 No |
| Conforms with IC | | No |
| EAC certificate available | | Yes |
| Conforms with UKCA (Importer) | | No |
| Conforms with AS-I | | No |
| ICAO Certification | | No |
| Conforms with DNV | | No |
| Conforms with RoHS CN | | No |
| Conforms with VdS | | No |
| | | INO |

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

EvoSIGNAL / EvoSIGNAL Accessories Mini Bracket GY

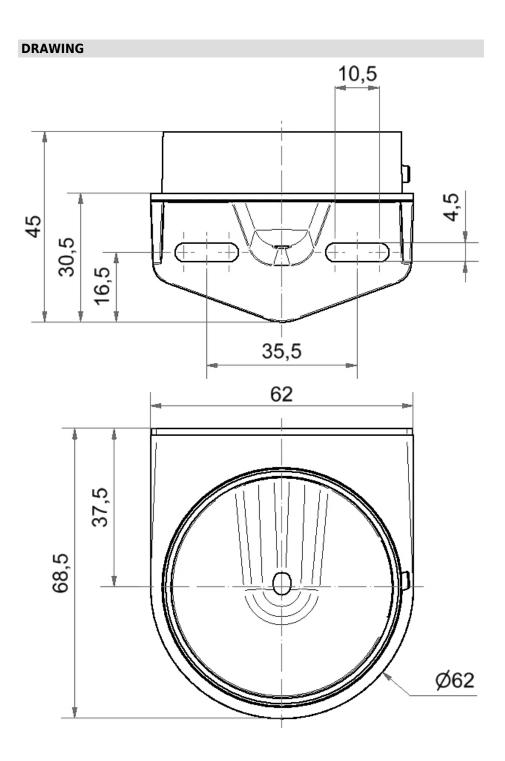

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.