

Mini free-standing Beacons / LED-Permanent Light 221

## LED Perm. Beacon BM 115VAC YE





| MECHANICAL DATA              |                             |
|------------------------------|-----------------------------|
| Height                       | 79 mm                       |
| Diameter                     | 75 mm                       |
| Materials                    | PA-GF<br>PC<br>PC/ABS       |
| Dome colour                  | Yellow                      |
| Housing colour               | Black                       |
| Protection category          | IP65                        |
| Connection                   | Spring-type terminal        |
| cross-sectional area maximum | 2,50mm <sup>2</sup> / 14AWG |
| Cable entry                  | Through hole                |
| Cable entry maximum          | d = 10 mm                   |
| Tension relief               | Present (conforms to VDE)   |
| Type of fixing               | Base mounting               |
| Working temperature minimum  | -20°C                       |
| Working temperature maximum  | +50°C                       |
| Weight with packaging        | 132 g                       |
| Product weight               | 105 g                       |

| ELECTRICAL DATA             |                          |
|-----------------------------|--------------------------|
| Operating voltage           | 115V                     |
| Operating voltage type      | AC                       |
| Operating voltage frequency | 60Hz                     |
| Operating voltage tolerance | +/- 10%                  |
| Rated operational voltage   | 115 VAC                  |
| Rated operational current   | 25 mA                    |
| Rated inrush current        | 500 mA                   |
| Protection class            | Protection class 2       |
| Pollution degree            | 3                        |
| Overvoltage category        | II                       |
| Isolation voltage           | Ui = 250V; Uimp = 2.500V |

| OPTICAL DATA         |                   |
|----------------------|-------------------|
| Light source         | LED               |
| Light colour         | Yellow            |
| Optical signal image | Permanent         |
| Service life optical | 100,000 h maximum |

| APPROVAL DATA    |     |  |
|------------------|-----|--|
| Conforms with CE | Yes |  |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Mini free-standing Beacons / LED-Permanent Light 221

## LED Perm. Beacon BM 115VAC YE


| Conforms with RoHS directive  | Yes                   |
|-------------------------------|-----------------------|
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | cULus                 |
| UL Type Rating                | Type 12               |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Mini free-standing Beacons / LED-Permanent Light 221

## LED Perm. Beacon BM 115VAC YE

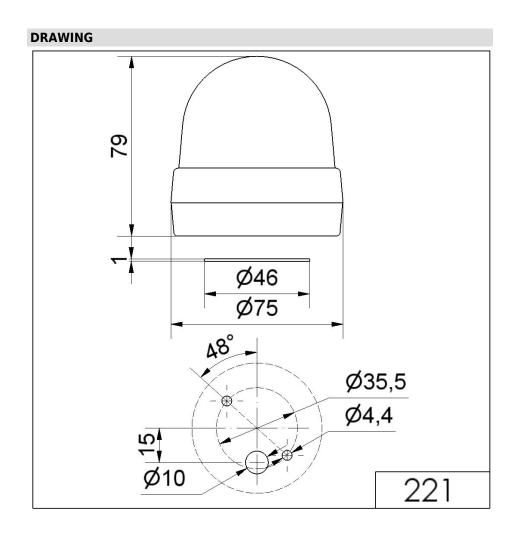

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.