KombiSIGN 71 / Terminal Element Terminal element M12 8-Pole BK




ļ

Series:	: 640.880.00 KombiSIGN 71			
ΜΕCΗΔΝΙ	ICAL DATA			
Height		59 mm		
Diameter		70 mm		
Materials		PA-GF		
		PC		
Housing colour		Black		
Protection category		IP65		
Connection		M12 plug 8-pole		
Type of fixing		Base mounting		
		Tube mounting		
Working temperature minimum		-30°C		
Working temperature maximum		+60°C		
Weight with packaging		100 g		
Product weight		79 g		
ELECTRIC	CAL DATA			
Operating voltage		10-31,6V		
Operating voltage type		DC		
Operating voltage tolerance		+/- 0%		
Protection class		Protection class 3		
Pollution degree		3		
Current carrying capacity		2A		
APPROVAL DATA Conforms with CE		Yes		
Conforms with RoHS directive		Yes		
WEFE		Yes		
Conforms with ATEX-directive		No		
Conforms with CCC		No		
Conforms with UL		cULus		
UL Type Rating		Type 12		
Conforms with FCC		No		
Conforms with IC		No		
EAC certificate available				
		Yes		
Conforms with UKCA (Importer)		Yes (WERMA (UK) Ltd.)		
Conforms with CMIM		No		
Conforms with AS-I		No		
Conforms with DNV		No		
Conforms with RoHS CN Conforms with VdS		No		
Contorms	with Vas	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Terminal Element Terminal element M12 8-Pole BK

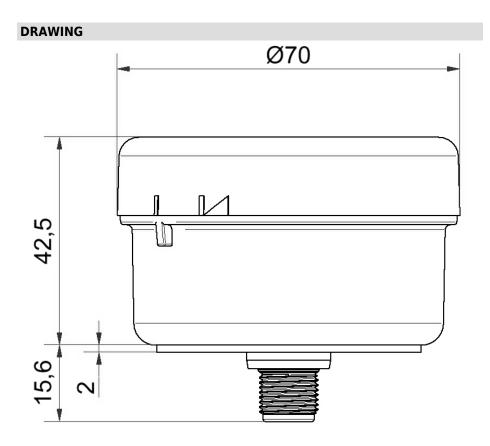

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / Terminal Element Terminal element M12 8-Pole BK

TERMINAL ASSIGNMENT				
640 880 00 Pin-Belegung/Pin-assignment				
8-pin	M12 Pin	Stufe / Tier		
A-coded	1	1		
A-coueu	2	2		
6 5 4	3	3		
	4	4		
	5	5		
3	6			
	7	СОМ		
	8			

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.