

Maxi free-standing Beacons / Revolving Signal Light 884

Rotating Beacon Fresnel 24VAC/DC GN

Part No.: 884.230.75





| MECHANICAL DATA | | |
|------------------------------|-----------------------------|--|
| Height | 218 mm | |
| Diameter | 142 mm | |
| Materials | PC PC/ABS | |
| Dome colour | Green | |
| Housing colour | Black | |
| Protection category | IP65 | |
| Connection | Screw terminals | |
| cross-sectional area maximum | 1,50mm ² / 16AWG | |
| Cable entry | Rubber pinch | |
| Cable entry minimum | d = 5 mm | |
| Cable entry maximum | d = 7 mm | |
| Tension relief | Pull-out protection | |
| Type of fixing | Base mounting | |
| Working temperature minimum | -30°C | |
| Working temperature maximum | +50°C | |
| Weight with packaging | 761 g | |
| Product weight | 672 g | |

| ELECTRICAL DATA | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 250 mA |
| Rated inrush current | 2600 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| Overvoltage category | II |

| OPTICAL DATA | |
|----------------------|------------------|
| Light source | LED |
| Light colour | Green |
| Optical signal image | Revolving |
| Service life optical | 50,000 h minimum |
| Rotation speed (rpm) | 60 U/min |

APPROVAL DATA

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Maxi free-standing Beacons / Revolving Signal Light 884

Rotating Beacon Fresnel 24VAC/DC GN


| Conforms with CE | Yes |
|-------------------------------|-----------------------|
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC-Ex | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Maxi free-standing Beacons / Revolving Signal Light 884

Rotating Beacon Fresnel 24VAC/DC GN

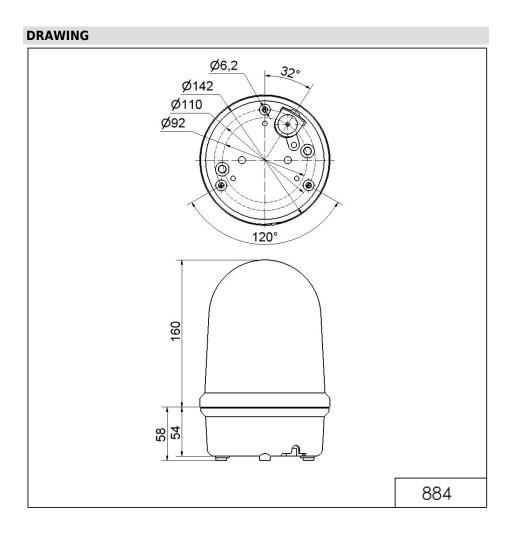

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.