

Signal tower / Terminal elements

Terminal element w. plug KS71/72



| | |
|-----------|--------------|
| Part No.: | 640.000.02 |
| Series: | KombiSIGN 71 |

MECHANICAL DATA

| | |
|-----------------------------|--------------------|
| Height | 36 mm |
| Diameter | 70 mm |
| Materials | PA-GF PC |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | Plug-in connection |
| Type of fixing | Tube mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 90 g |
| Product weight | 72 g |

ELECTRICAL DATA

| | |
|------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Protection class | Protection class 2 |
| Pollution degree | 2 |

APPROVAL DATA

| | |
|------------------------------|--------------------------------|
| Conforms with CE | No |
| Conforms with RoHS directive | Fulfills substance restriction |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | No |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Signal tower / Terminal elements

Terminal element w. plug KS71/72

DRAWING

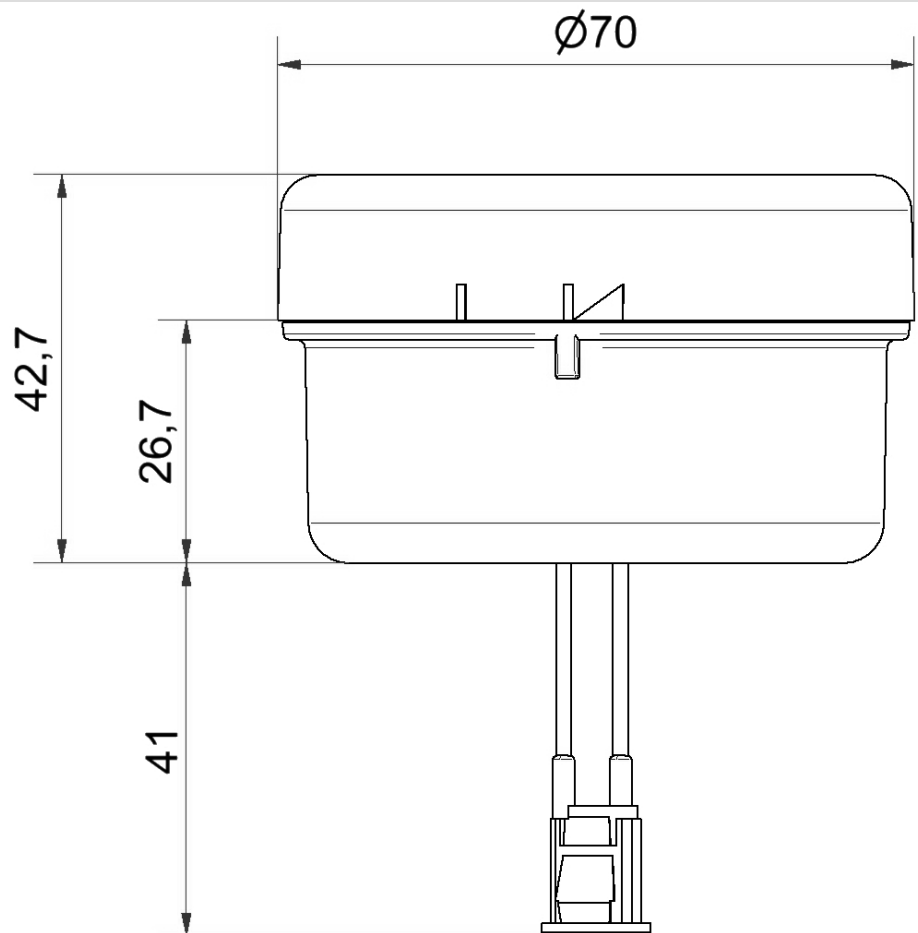

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.