

Completely pre-assembled Signal Towers / eSIGN

eSIGN 9 Segments with Siren WH



| art No.: | 657.300.55 | $C \in$ | | |
|----------|------------|---------|-----------|---|
| es: | eSIGN | | c (VL) us | Č |

| MECHANICAL DATA | | |
|-----------------------------|--------------------------------|--|
| Height | 271 mm | |
| Diameter | 72 mm | |
| Materials | PC | |
| Dome colour | Tranclucent | |
| Housing colour | White | |
| Protection category | IP66 IP69K | |
| Connection | M12 plug 8-pole | |
| Type of fixing | Base mounting Tube mounting | |
| Working temperature minimum | -30°C | |
| Working temperature maximum | +60°C | |
| Weight with packaging | 622 g | |
| Product weight | 575 g | |
| IK-Code (IEC 62262) | IK08 | |

| ELECTRICAL DATA | | |
|-----------------------------|-------------------------|--|
| Operating voltage | 24V | |
| Operating voltage type | DC | |
| Operating voltage tolerance | +/- 10% | |
| Rated operational voltage | 24 VDC | |
| Rated operational current | 405 mA | |
| Rated inrush current | 800 mA | |
| Protection class | Protection class 3 | |
| Pollution degree | 3 | |
| Overvoltage category | I | |
| Isolation voltage | Ui = 50V / Uimp = 330V | |
| Request to external PSU | SELV/PELV | |
| connectivity | Digital entrance USB | |

| OPTICAL DATA | | | |
|----------------------|---|--|--|
| Light source | LED | | |
| Light colour | MC >1.000.000 colours | | |
| Optical signal image | Blink Double flash Flash Permanent | | |
| Blink frequency | Configurable | | |
| Service life optical | 50,000 h maximum | | |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / eSIGN

eSIGN 9 Segments with Siren WH

| ACOUSTIC DATA | | | |
|-----------------------------|-----------------|--|--|
| Volume (max) at 1m distance | 105 dB | | |
| Acoustic signal image | Multi-tone | | |
| Number of tones | 10 tone | | |
| Acoustic service life | 5,000 h minimum | | |


| APPROVAL DATA | | |
|-------------------------------|-----------------------|--|
| Conforms with CE | Yes | |
| Conforms with RoHS directive | Yes | |
| WEEE | Yes | |
| Conforms with ATEX-directive | No | |
| Conforms with CCC-Ex | No | |
| Conforms with CCC | No | |
| Conforms with UL | cULus | |
| UL Type Rating | Type 4/4X/12/13 | |
| Conforms with FCC | No | |
| Conforms with IC | No | |
| EAC certificate available | No | |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) | |
| Conforms with CMIM | No | |
| Conforms with AS-I | No | |
| Conforms with DNV | No | |
| Conforms with RoHS CN | No | |
| Conforms with VdS | No | |
| MTTF-value [years] | 39 | |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / eSIGN

eSIGN 9 Segments with Siren WH

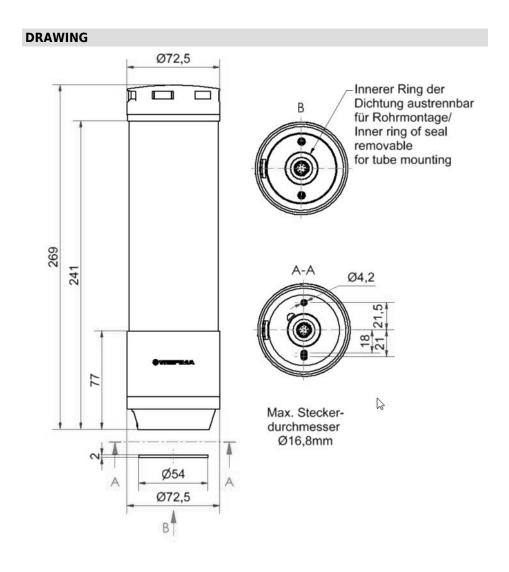

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.