

Maxi free-standing Beacons / LED Rotating Signal Beacon 280

LED Rotating Beacon BM 115-230VAC YE



Part No.: 280.320.68



218 mm
142 mm
PC PC/ABS
Yellow
Black
IP65
Screw terminals
2,50mm ² / 14AWG
Rubber pinch
d = 5 mm
d = 7 mm
Base mounting
-30°C
+50°C
633 g
544 g

ELECTRICAL DATA	
Operating voltage	115-230V
Operating voltage type	AC
Operating voltage frequency	50Hz at 230V 60Hz at 115V
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	140 mA
Rated inrush current	500 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V

OPTICAL DATA		
Light source	LED	
Light colour	Yellow	
Optical signal image	Revolving	
Service life optical	50,000 h maximum	
Rotation speed (rpm)	180 U/min	

APPROVAL DATA

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Maxi free-standing Beacons / LED Rotating Signal Beacon 280

LED Rotating Beacon BM 115-230VAC YE


Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Maxi free-standing Beacons / LED Rotating Signal Beacon 280

LED Rotating Beacon BM 115-230VAC YE

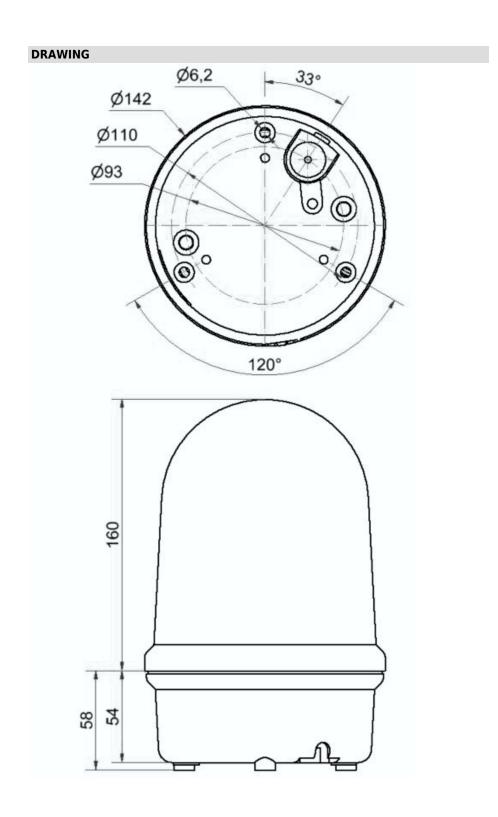

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.