

KombiSIGN 50 / LED Flashing Element 848

LED Flashing light el. 24VDC BU



Part No.:	848.520.55
Series:	KombiSIGN 50



MECHANICAL DATA		
Height	67 mm	
Diameter	52 mm	
Materials	PC	
Dome colour	Blue	
Protection category	IP54	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	66 g	
Product weight	55 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	40 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3	

OPTICAL DATA		
Light source	LED	
Light colour	Blue	
Optical signal image	Flash	
Flash frequency	1 Hz	
Service life optical	50,000 h maximum	

APPROVAL DATA		
Conforms with CE	Yes	
Conforms with RoHS directive	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 50 / LED Flashing Element 848

LED Flashing light el. 24VDC BU

Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

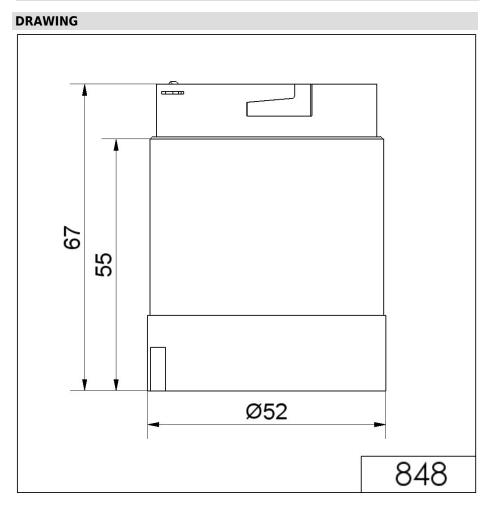

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.