

Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC WH/GN/YE



art No.:	699.240.75		շ (Մ) սչ
Series:	Kompakt 37		c QL) us

MECHANICAL DATA			
Height	209 mm		
Diameter	38 mm		
Materials	PC		
Dome colour	Clear Green Red Yellow		
Housing colour	Black		
Protection category	IP65		
Connection	M12 plug 8-pole		
Cable entry	Membrane grommet		
Cable entry minimum	d = 1 mm		
Cable entry maximum	d = 9 mm		
Tension relief	Pull-out protection		
Type of fixing	Built-in mounting		
Working temperature minimum	-20°C		
Working temperature maximum	+50°C		
Weight with packaging	156 g		
Product weight	102 g		

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	160 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA				
Light source	LED			
Light colour	Green Red White Yellow			
Optical signal image	Permanent			
Service life optical	50,000 h maximum			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC WH/GN/YE

ACOUSTIC DATA			
Volume (max) at 1m distance	85,0 dB (A)		
Acoustic signal image	Pulse tone		
Audio frequency	2900 Hz		
Acoustic service life	5,000 h minimum		


APPROVAL DATA			
Conforms with CE	Yes		
Conforms with RoHS directive	Yes		
WEEE	Yes		
Conforms with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	cULus		
UL Type Rating	Type 12 Type 4X		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with DNV	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC WH/GN/YE

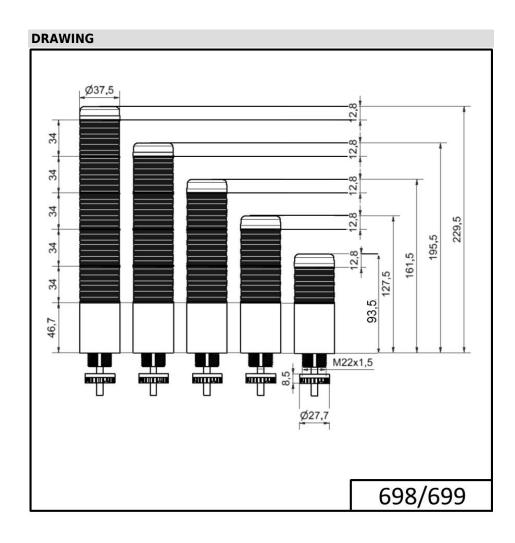

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.