Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC WH/



ļ

Part No.:699.440.75 Kompakt 37Image: Compakt 37MECHANICAL DATAHeight209 mmDiameter38 mmMaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry maximumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum156 gProduct weight102 g	UK		
MECHANICAL DATAHeight209 mmDiameter38 mmMaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum156 gProduct weight102 g			
Height209 mmDiameter38 mmMaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry maximumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum156 gProduct weight102 g			
Diameter38 mmMaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
MaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Dome colourClearHousing colourSilverProtection categoryIP65ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum156 gProduct weight102 g			
Housing colourSilverProtection categoryIP65ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Protection categoryIP65ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
ConnectionM12 plug 8-poleCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumPull-out protectionTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Cable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Cable entry minimumd = 1 mmCable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Cable entry maximumd = 9 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Tension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Type of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Working temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Working temperature maximum+50°CWeight with packaging156 gProduct weight102 g			
Weight with packaging156 gProduct weight102 g			
Product weight 102 g			
ELECTRICAL DATA	ELECTRICAL DATA		
Operating voltage 24V			
Operating voltage type AC/DC			
Operating voltage frequency 50Hz			
Operating voltage tolerance +/- 10%			
Rated operational voltage 24 VDC			
Rated operational current 160 mA			
Rated inrush current 500 mA			
Protection class Protection class 2			
Pollution degree 3 In the connection area: 2			
OPTICAL DATA			
Light source LED			
Light colour Green Red White Yellow			
Optical signal image Permanent			
Service life optical 50,000 h maximum			
ACOUSTIC DATA			
Volume (max) at 1m distance 85,0 dB (A)			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC WH/

Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC WH/

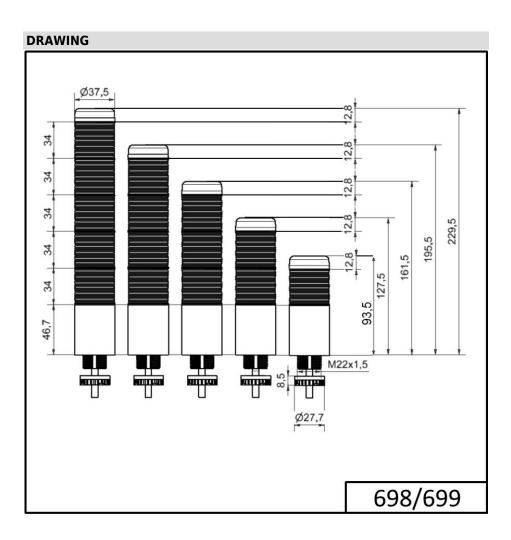

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.