

Mini / Flash/Multi-Tone Sounder 423

## Flash/Sounder WM 8 tne 24VAC/DC YE



Part No.: 423.320.75



MECHANICAL DATA	
Height	121 mm
Diameter	83 mm
Materials	PC
Dome colour	Yellow
Housing colour	Grey
Protection category	IP65
Connection	Screw terminals
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9 mm
Tension relief	Pull-out protection
Type of fixing	Wall mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	179 g
Product weight	147 g

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	120 mA	
Rated inrush current	1.000 mA	
Protection class	Protection class 2	
Pollution degree	3	

OPTICAL DATA		
Light source	Xenon	
Light colour	Yellow	
Optical signal image	Flash	
Flash frequency	1 Hz	
Flash output	1 J	
Service life optical	4 million flashes minimum	

ACOUSTIC DATA	
Volume (max) at 1m distance	109,0 dB (A)

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



## Mini / Flash/Multi-Tone Sounder 423

## Flash/Sounder WM 8 tne 24VAC/DC YE

Acoustic signal image	Multi-tone
Number of tones	8 tone
Acoustic service life	5,000 h minimum


APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Mini / Flash/Multi-Tone Sounder 423

## Flash/Sounder WM 8 tne 24VAC/DC YE

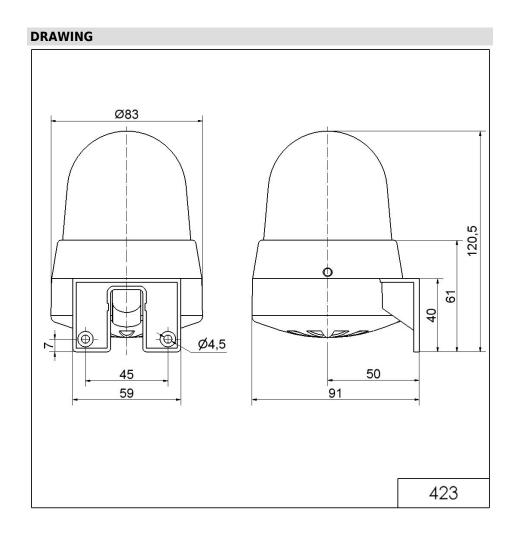

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.