

KombiSIGN 71 / Terminal Element

Terminal element M12 8-Pole GY







MECHANICAL DATA	
Height	59 mm
Diameter	70 mm
Materials	PA-GF PC
Housing colour	Grey
Protection category	IP65
Connection	M12 plug 8-pole
Type of fixing	Base mounting Tube mounting
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	103 g
Product weight	82 g

ELECTRICAL DATA		
Operating voltage	10-31,6V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 0%	
Protection class	Protection class 3	
Pollution degree	3	
Current carrying capacity	2A	


APPROVAL DATA		
Conforms with CE	Yes	
Conforms with RoHS directive	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with CMIM	No	
Conforms with AS-I	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 71 / Terminal Element

Terminal element M12 8-Pole GY

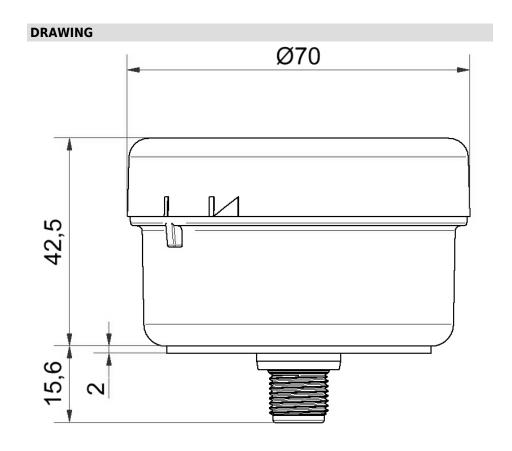

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



KombiSIGN 71 / Terminal Element

Terminal element M12 8-Pole GY

TERMINAL ASSIGNMENT				
640 980 00 Pin-Belegung/Pin-assignment				
8-pin	M12 Pin	Stufe / Tier		
A-coded	1	1		
	2	2		
6 5 4	3	3		
	4	4		
	5	5		
3	6			
	7	СОМ		
1 2	8			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.