## AndonWIRELESS / Andon product AndonWirelessBOX 2-Button 868 MHz



ļ

Part No.: 860.000.16



n 6 nt 3 rials Pri ing colour B G cction category IP	03 mm 66 mm 85 mm 9C PC/ABS Black Grey P30 Base mounting Vall mounting
nt 31 rials Print 31 ing colour B cction category IP	35 mm PC PC/ABS Black Grey P30 Base mounting Vall mounting
rials Property Proper	PC PC/ABS Black Grey P30 Base mounting Vall mounting
ing colour B G ection category IP	PC/ABS Black Grey P30 Base mounting Vall mounting
G ection category IP	Grey P30 Base mounting Vall mounting
	Base mounting Vall mounting
	Vall mounting
	200
ing temperature minimum 0	
ing temperature maximum +	⊦40°C
ht with packaging 4.	l35 g
uct weight 2	283 g
CTRICAL DATA	
	.15-230V
	AC
ating voltage frequency 5	0Hz at 230V 0Hz at 115V
ating voltage tolerance +	+/- 10%
d operational voltage 2	230 VAC
d operational current 5	600 mA
ction class P	Protection class 2
tion degree 2	2
voltage category II	
ion voltage U	Ji = 250V; Uimp = 2.500V
o range max. 3	800 m
transmission power 1	.0 dBm at 50 Ohm
	368.000 MHz 368.600 MHz
channels 6	5
ectivity U	JSB
ROVAL DATA	
orms with CE Ye	′es
orms with RoHS directive Ye	′es
E Ye	′es
orms with CCC N	10
orms with UL N	10

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


ļ




## AndonWIRELESS / Andon product AndonWirelessBOX 2-Button 868 MHz

Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	10 years
Conforms with VdS	No

## DRAWING

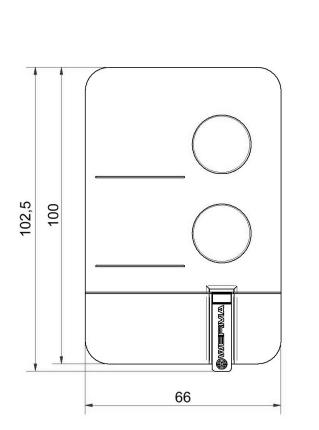

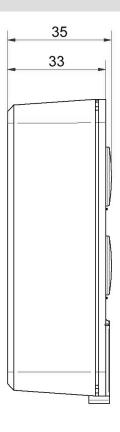

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.