

### Completely pre-assembled Signal Towers / RST 56

# RST56 Built-In 24V WH/BU/GN/YE/RD



Part No.: 686.593.05 Series: RST 56



MECHANICAL DATA		
Height	289 mm	
Diameter	57 mm	
Materials	ABS PC	
Dome colour	White	
Housing colour	Black	
Protection category	IP66 IP69K	
Connection	M12 socket 8-pole	
Type of fixing	Built-in mounting	
Working temperature minimum	-30°C	
Working temperature maximum	+50°C	
Weight with packaging	353.4 g	
Product weight	314.4 g	
IK-Code (IEC 62262)	IK05	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Protection class	Protection class 3	
Pollution degree	3	

OPTICAL DATA		
Light source	LED	
Light colour	Blue Green Red White Yellow	
Optical signal image	Permanent	
Service life optical	50,000 h maximum	

APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



## Completely pre-assembled Signal Towers / RST 56

# RST56 Built-In 24V WH/BU/GN/YE/RD


Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	25 years
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / RST 56

# RST56 Built-In 24V WH/BU/GN/YE/RD

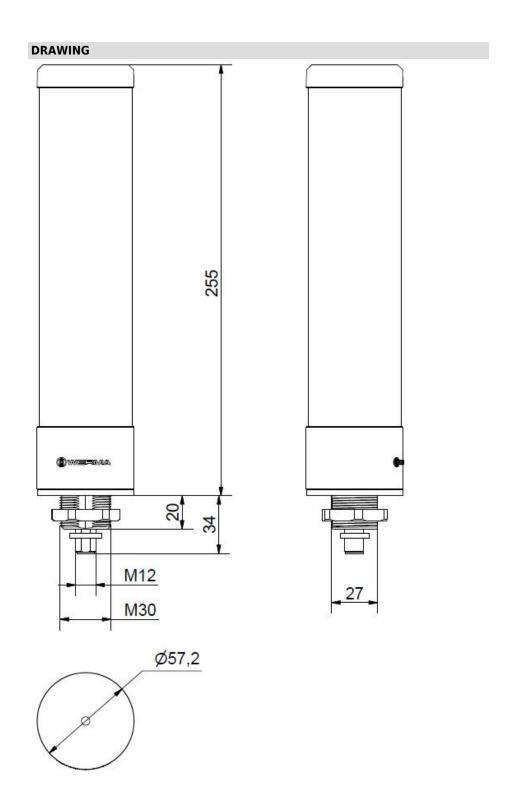

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.