

Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren WH



Part No.:	657.800.55
Series:	eSIGN

MECHANICAL DATA			
Height	372 mm		
Diameter	72 mm		
Materials	PC		
Dome colour	Tranclucent		
Housing colour	White		
Protection category	IP66 IP69K		
Connection	M12 plug 8-pole		
Type of fixing	Base mounting Tube mounting		
Working temperature minimum	-30°C		
Working temperature maximum	+60°C		
Weight with packaging	849 g		
Product weight	792 g		
IK-Code (IEC 62262)	IK08		

ELECTRICAL DATA			
Operating voltage	24V		
Operating voltage type	DC		
Operating voltage tolerance	+/- 10%		
Rated operational voltage	24 VDC		
Rated operational current	620 mA		
Rated inrush current	800 mA		
Protection class	Protection class 3		
Pollution degree	3		
Overvoltage category	I		
Isolation voltage	Ui = 50V / Uimp = 330V		
Request to external PSU	SELV/PELV		
connectivity	Digital entrance USB		

OPTICAL DATA				
Light source	LED			
Light colour	MC >1.000.000 colours			
Optical signal image	Blink Double flash Flash Permanent			
Blink frequency	Configurable			
Service life optical	50,000 h maximum			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren WH

ACOUSTIC DATA				
Volume (max) at 1m distance	105 dB			
Acoustic signal image	Multi-tone			
Number of tones	10 tone			
Acoustic service life	5,000 h minimum			


APPROVAL DATA				
Conforms with CE	Yes			
Conforms with RoHS directive	Yes			
WEEE	Yes			
Conforms with ATEX-directive	No			
Conforms with CCC-Ex	No			
Conforms with CCC	No			
Conforms with UL	cULus			
UL Type Rating	Type 4/4X/12/13			
Conforms with FCC	No			
Conforms with IC	No			
EAC certificate available	No			
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)			
Conforms with CMIM	No			
Conforms with AS-I	No			
Conforms with DNV	No			
Conforms with RoHS CN	No			
Conforms with VdS	No			
MTTF-value [years]	31			

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / eSIGN

eSIGN 15 Segments with Siren WH

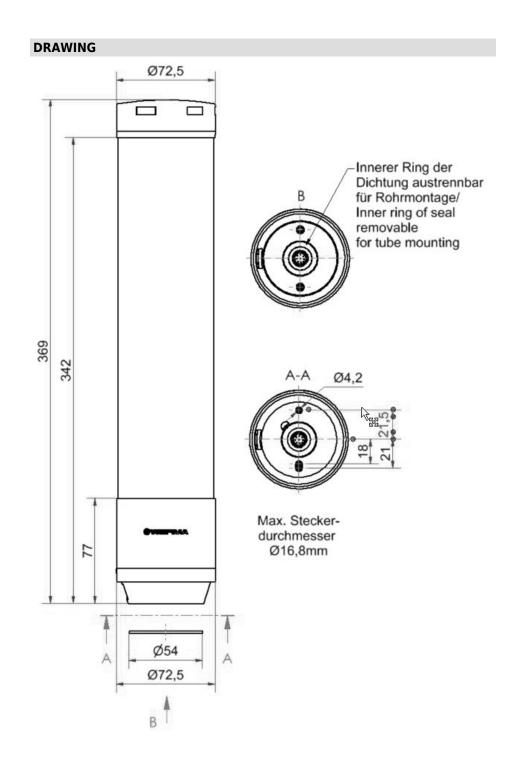

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.