

KombiSIGN 40 / DesignLOOK

Siren element contin/pulse 24VAC/DC GY



| | |
|-----------|--------------|
| Part No.: | 635.700.75 |
| Series: | KombiSIGN 40 |



MECHANICAL DATA

| | |
|-----------------------------|---------------|
| Height | 45 mm |
| Diameter | 40 mm |
| Materials | PC |
| Housing colour | Grey |
| Protection category | IP66 IP69K |
| Working temperature minimum | -30°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 35 g |
| Product weight | 25 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 80 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 3 |
| Pollution degree | 3 |
| Request to external PSU | SELV/PELV |

ACOUSTIC DATA

| | |
|-----------------------------|-------------------------------|
| Volume (max) at 1m distance | 85,0 dB (A) |
| Acoustic signal image | Continuous tone Pulse tone |
| Audio frequency | 2900 Hz |
| Acoustic service life | 5,000 h minimum |

APPROVAL DATA

| | |
|------------------------------|---------|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| Conforms with FCC | No |
| Conforms with IC | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / DesignLOOK

Siren element contin/pulse 24VAC/DC GY

| | |
|-------------------------------|-----------------------|
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |
| MTTF-value [years] | 1705 |

DRAWING

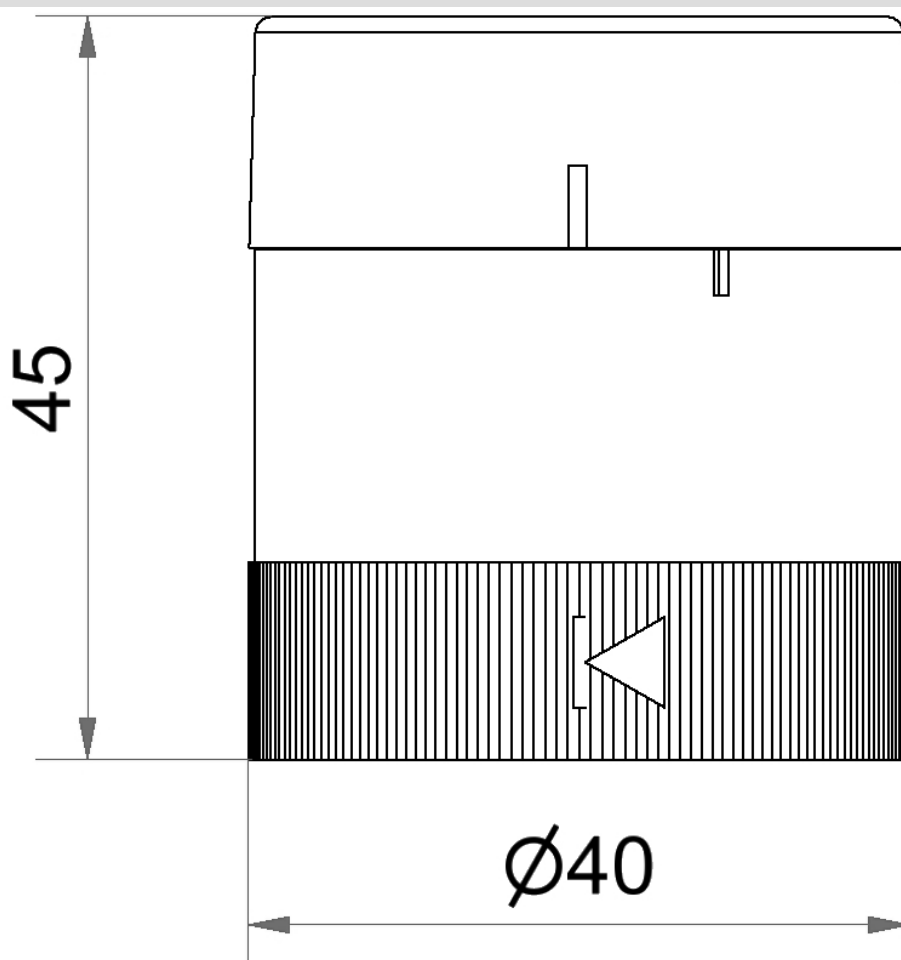

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.