Signal lights / Rotating Beacon Rotating Mirror Beacon LED 24VAC/DC GN



ļ

Part No.: 885.230.75

CE	UK
	CA

MECHANICAL DATA

MECHANICAL DATA		
Height	151 mm	
Diameter	98 mm	
Materials	PC PC/ABS	
Dome colour	Green	
Housing colour	Black	
Protection category	IP65	
Connection	Screw terminals	
cross-sectional area maximum	1,50mm² / 16AWG	
Cable entry	Rubber pinch	
Cable entry minimum	d = 5 mm	
Cable entry maximum	d = 7 mm	
Type of fixing	Base mounting	
Working temperature minimum	-30°C	
Working temperature maximum	+50°C	
Weight with packaging	370 g	
Product weight	320 g	
ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	175 mA	
Rated inrush current	<10A	
Protection class	Protection class 2	
Pollution degree	3	
Overvoltage category	ll	
OPTICAL DATA		
Light source	LED	
Light colour	Green	
Optical signal image	Revolving	
Service life optical	50,000 h maximum	
Rotation speed (rpm)	180 U/min	
APPROVAL DATA		
Conforms with CE	Yes	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Signal lights / Rotating Beacon Rotating Mirror Beacon LED 24VAC/DC GN

Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

Signal lights / Rotating Beacon Rotating Mirror Beacon LED 24VAC/DC GN

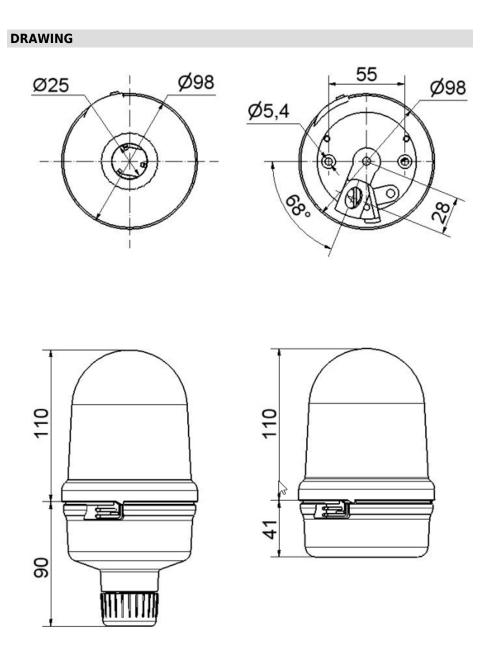

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.