

Electromechanical Audible Signal Devices / Alarm Bell  
**Bells continuous tone 230VAC GY**



Part No.: **914.052.68**



<b>MECHANICAL DATA</b>	
Height	76 mm
Diameter	167 mm
Materials	Steel
Housing colour	Grey
Protection category	IP66
Connection	Screw terminals
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Cable entry	Screwed cable gland
Cable entry minimum	d = 5 mm
Cable entry maximum	d = 9 mm
Tension relief	Present (conforms to VDE)
Type of fixing	Wall mounting
Working temperature minimum	-30°C
Working temperature maximum	+50°C
Weight with packaging	1534 g
Product weight	1439 g
<b>ELECTRICAL DATA</b>	
Operating voltage	230V
Operating voltage type	AC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	55 mA
Rated inrush current	3.000 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V
<b>OPTICAL DATA</b>	
Service life optical	200 h minimum
<b>ACOUSTIC DATA</b>	
Volume (max) at 1m distance	100,0 dB (A)
Acoustic signal image	Continuous tone
Acoustic service life	200 h minimum
<b>APPROVAL DATA</b>	
Conforms with CE	Yes


**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Electromechanical Audible Signal Devices / Alarm Bell

**Bells continuous tone 230VAC GY**

Conforms with RoHS directive	Yes
WEEE	No
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

**DRAWING**

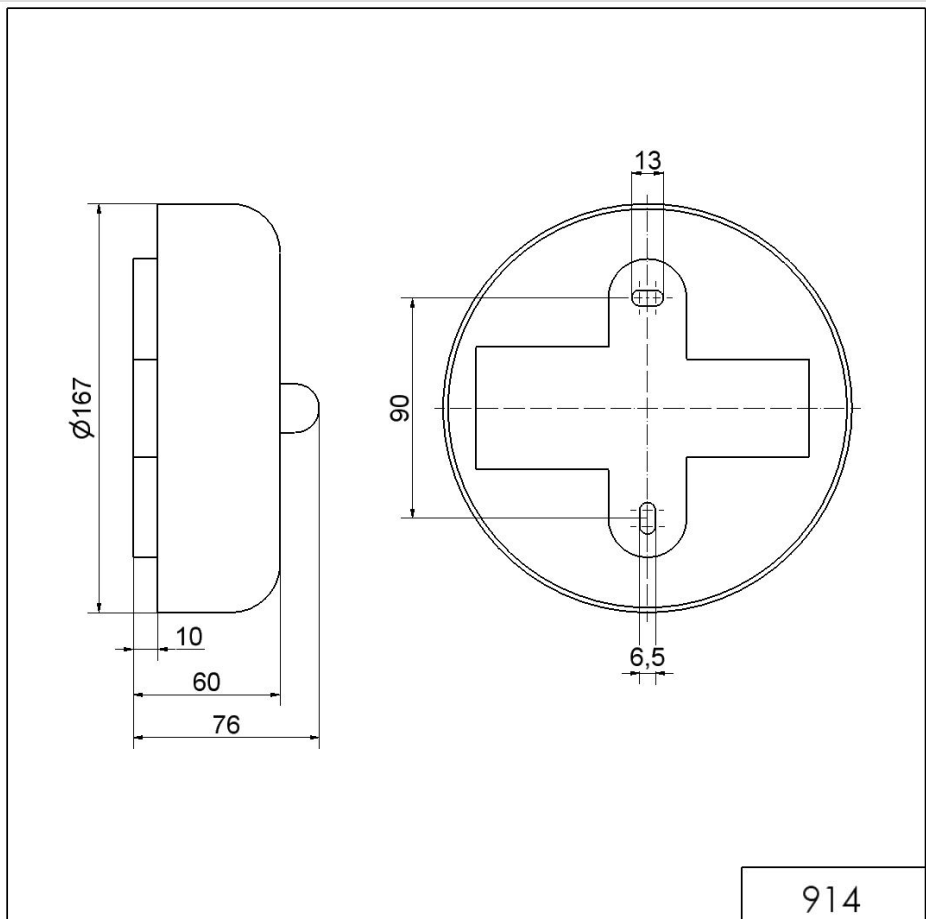

914

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.