

Modular Signal Towers / KombiSIGN 72

Element IO-Link KS71/72 24VDC CL



Part No.:	646.440.55
Series:	KombiSIGN 71

MECHANICAL DATA		
Height	66 mm	
Diameter	70 mm	
Materials	PC	
Dome colour	Clear	
Protection category	IP65	
Connection	IO-LINK	
Working temperature minimum	-30°C	
Working temperature maximum	+60°C	
Weight with packaging	80 g	
Product weight	60 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	6 mA	
Protection class	Protection class 2	
Pollution degree	3	
connectivity	IO-Link	

APPROVAL DATA		
Conforms with CE	Yes	
Conforms with RoHS directive	Yes	
WEEE	Yes	
Conforms with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with CMIM	No	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Modular Signal Towers / KombiSIGN 72

Element IO-Link KS71/72 24VDC CL



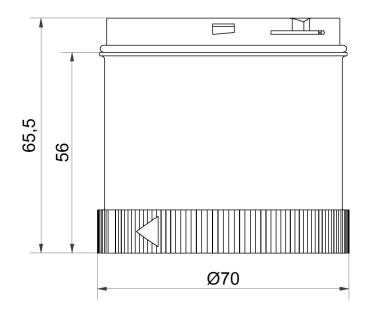

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.