

AndonWIRELESS / Andon product

AndonWirelessBOX 2-Button 921 MHz



Part No.: 860.000.17







103 mm
66 mm
35 mm
PC PC/ABS
Black Grey
IP30
Base mounting Wall mounting
0°C
+40°C
428 g
273 g

ELECTRICAL DATA	
Operating voltage	115-230V
Operating voltage type	AC
Operating voltage frequency	50Hz at 230V 60Hz at 115V
Operating voltage tolerance	+/- 10%
Rated operational voltage	230 VAC
Rated operational current	500 mA
Protection class	Protection class 2
Pollution degree	2
Overvoltage category	II
Isolation voltage	Ui = 250V; Uimp = 2.500V
Radio range max.	200 m
Radio transmission power	10 dBm at 50 Ohm
Radio frequency min/max	921.000 MHz 922.000 MHz
Radio channels	6
connectivity	USB

APPROVAL DATA	
Conforms with CE	No
Conforms with RoHS directive	Fulfills substance restriction
WEEE	Yes
Conforms with CCC	No
Conforms with UL	cULus I.T.E. E503964

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.





AndonWIRELESS / Andon product

AndonWirelessBOX 2-Button 921 MHz

Conforms with FCC	Yes
Conforms with IC	Yes
EAC certificate available	No
Conforms with UKCA (Importer)	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	10 years
Conforms with VdS	No

DRAWING

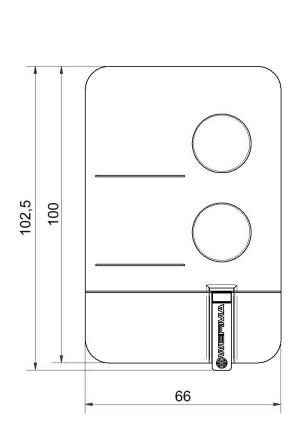

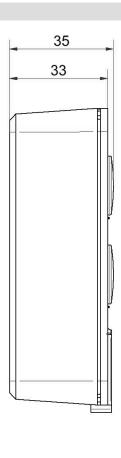

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.